

Make the Switch to Wireless



Latest Smartphone product.

Does not need cell service to work.

Greater than 100-foot range.

Mounts 3 ways:

- Directly replaces the switch
- Works with the switch
- Bluetooth only

Universal for all 12Volt features:

- Jacks, Awnings, Slides
- Lights (LED and Blub)
- Relays and Hydraulics

Multiple Safety features:

- smartLOCK (patent pending)
 - Motion Sensing
 - Reverse protection
 - Short circuit
 - Over current
 - Over temp
 - Under and Over voltage

smartRVapp

- Apple and Android
- Free, no advertising
- Can pair to as many modules as you need

The smartRVcontrols are multi-use remote control modules that can be configured to operate any 12V electrical features in your RV, such as lights, Bulb or LED, jacks, awnings, slides, relays, valves, RGB LEDs and more.

Download the free easy-to-use smartRVapp, available for iOS and Android, to configure a module for the function you need and take control right from your phone.

The smartRVcontrols OEM module is design specifically to be used with the existing switch controls. The module has been created so that when used with a DC motor a light can also be attached to the device and controlled from the app. With some very minor wiring using quick disconnects you can easily connect the smartRVcontrols OEM module into the wiring and you are controlling the feature via your smartphone. Of course the original switch works at all times.

If you are installing a new feature such as an awning, The smartRVcontrols module are smartphone controls and a manual switch all in one! Additionally, the smartRVcontrols have a special feature that allows a light to be controlled by the same module that controls the feature, so you get control of your awning and a light. That is amazing!

Our Patent Pending smartLOCK environmental safety system ensures that your devices will not activate while your RV is in motion or in any other unsafe condition. The smartRVcontrols module has a 1-year manufacturer defect warranty.



Make the Switch to Wireless



Power and Ground connections

Accessory light connection

Connections to a single pole double throw switch, one half of the standard RV power switch can be used

LED indicator on back of the module and can be seen through the casing

LED indicator: Shows conditions of unit with a sequence of lights at 1 sec intervals

- | | |
|-------------|--|
| Green: | Your smartRVcontrols is on and has no problems but is not connected to the phone |
| Blue: | Your smartRVcontrols is on and has no problems and is connected to the phone |
| Red: | There is an issue: Device is not configured, device is motion locked, or it is in over current |
| White: | The smartRVcontrols are being controlled by the existing wall switch |
| Light Blue: | The smartRVcontrols are being controlled by a phone via the app |
| Purple: | Voltage supply is outside of the nominal operating range (9 volts -15volts) |
| Yellow: | The device is not configured, it must be configured to operate properly |



Make the Switch to Wireless



Smart
RV
Controls



Wire Connections


Output1: DC motor

Ground: DC Ground @ 30A

Light: Optional light control

Power: 12V DC @ 30A

Output2: DC motor

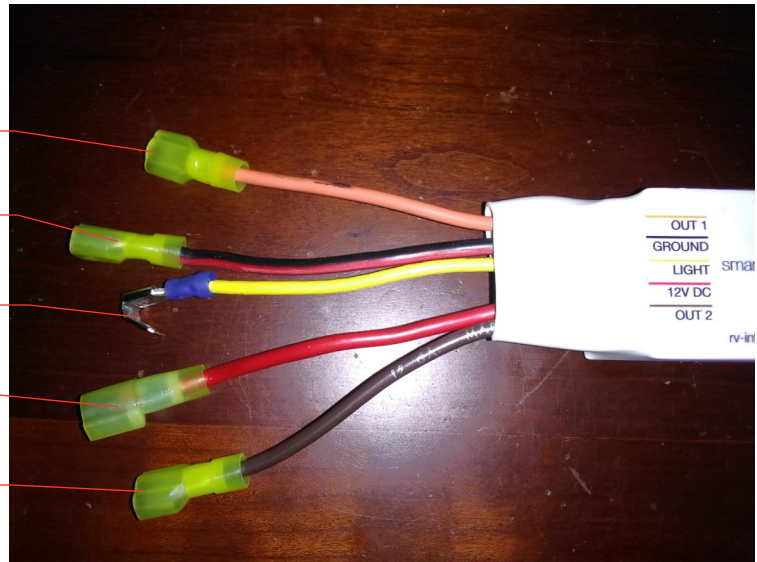

Input1: SPDT (off-mom)

12V: SPDT (center) low current

Input2: SPDT (off-mom)



Make the Switch to Wireless




Smart
RV
Controls



DC Motors: Jacks Awnings Slides

Basic wiring diagram for a
12 Volt Electric Motor for a Jack Awning or
Slide and accessory light

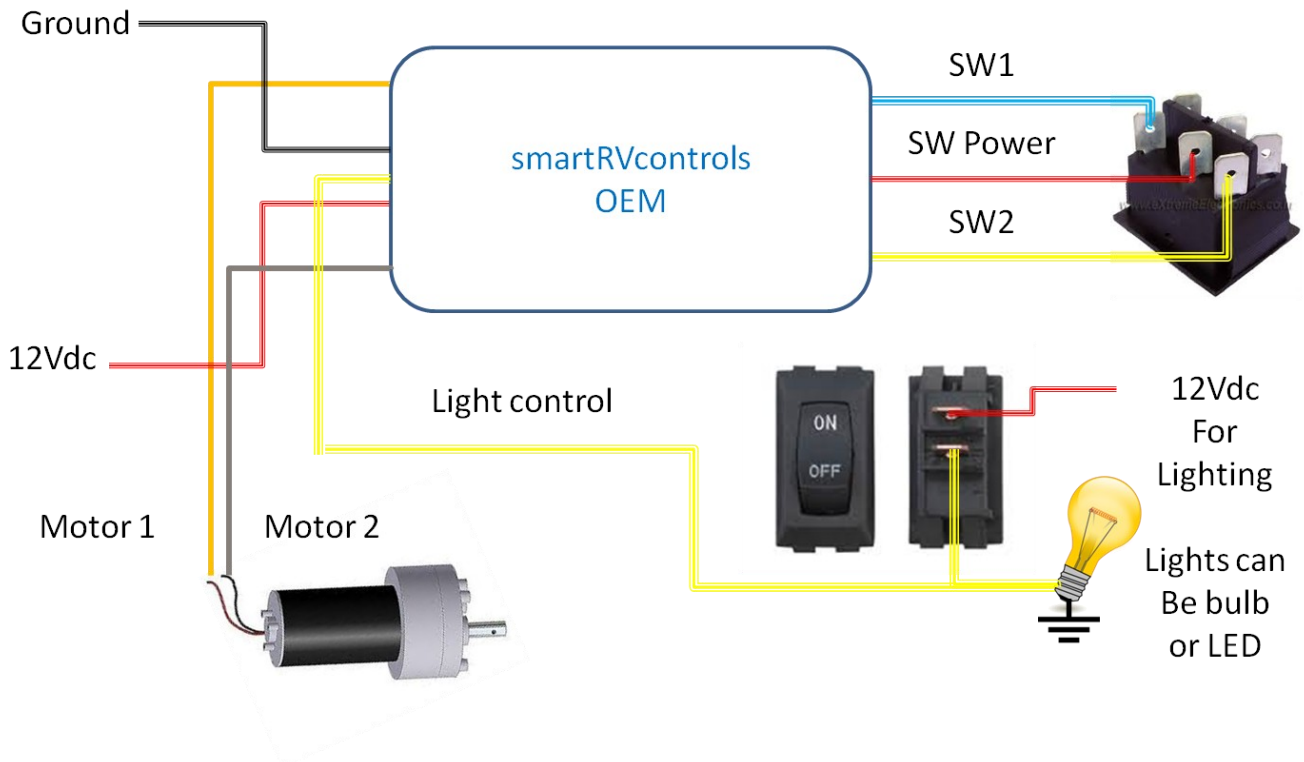




Make the Switch to Wireless

Smart
RV
Controls



Dual Light Control

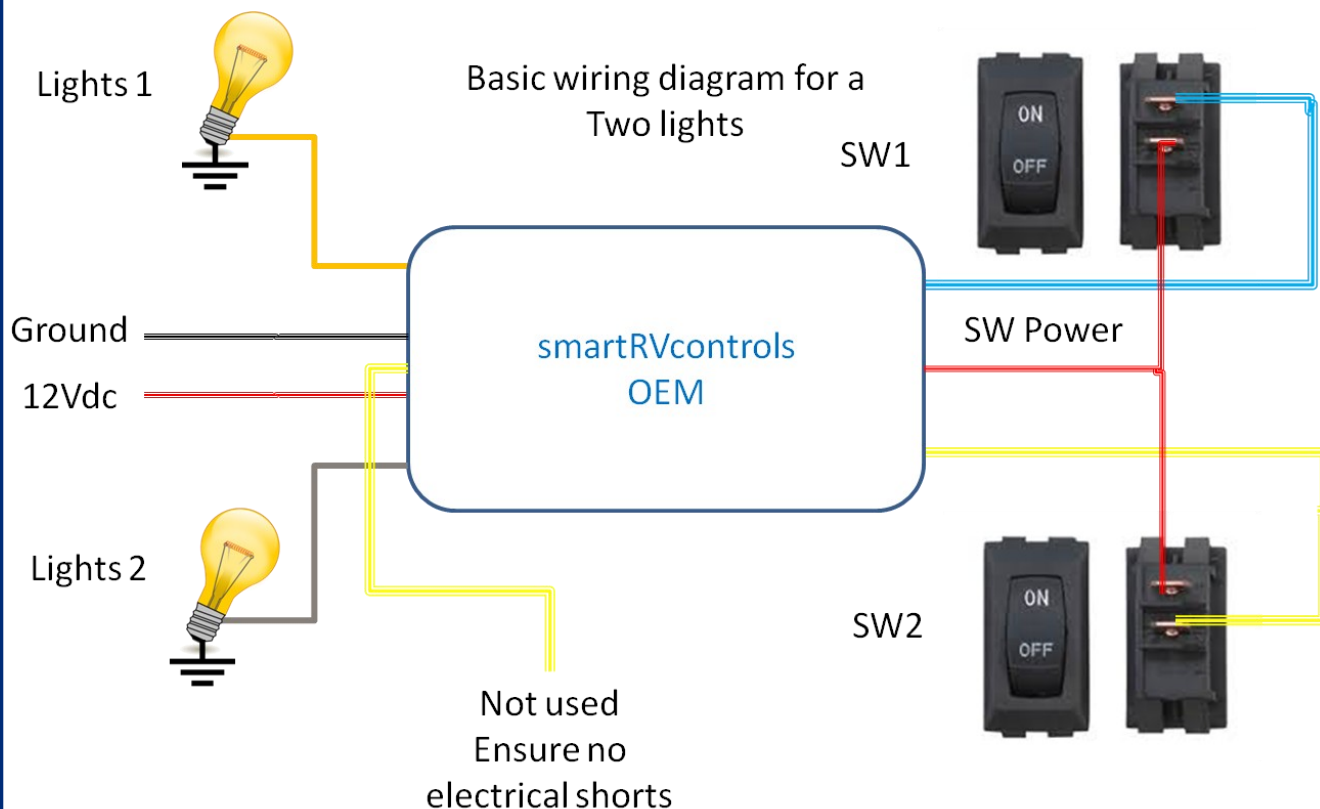

Make the Switch to Wireless



SmartRV Controls

FAQs



Do I have to have cellular coverage or WiFi access to use the smartRVapp?

No, smartRVcontrols is connected by Bluetooth Low Energy (BLE).

Can I add another smartRVcontrols module to this app?

Yes, multiple smartRVcontrols can be operated with the app. You simply select the device you wish to operate from the device listing in the menu after selecting the plus(+) sign in the upper right corner.

What is the smartRVapp's working range?

Approximately 100 feet. Range is dependent on many factors; the application shows signal strength and will warn you if you are outside the effective range.

Can the smartRVcontrols be restored to factory defaults, no paired devices, and the PIN reset to 123456?

Yes, rock the manual control switch 3 times or more within 5 seconds. The indicator will cycle through all the colors and the smartRVcontrol module will reset all features to factory default, clear all pairings, and resets the PIN to 123456.

What is the smartLOCK environmental safety system, and why do I need it: In most RVs the features (slides, awnings and jacks) all have power available to them while the RV is being transported. Very few RVs have a safety interlock that prevents operation while the RV is in motion. If something were to fall against the switch while the RV was in transit, or someone were to activate an old-fashioned key fob remote control, it could start to move, really, it is not hard to image the many disastrous results! The smartRVcontrols module not only adds the convenience of smartphone remote controls, but in addition our smart-LOCK technology provides this essential safety interlock in your RV, for our smartphone app and even for the manual switch, solving this scary problem.

Make the Switch to Wireless



SmartRV Controls

Trouble Shooting 1



Protection: Testing smartLOCK

While the unit is not attached to the wall, you can test the motion detection by slightly moving the smartRVcontrols unit. This motion should be detected and the unit should show a RED indication, GREEN/RED if not connected, BLUE//RED if connected. If connected to a phone, the app should show that the device is locked. The smartRVcontrols can be unlocked by entering the password on the app or any manual switch activity. Both return the unit to normal function. The motion detection sensitivity is a setting on the configuration page and can be made more or less sensitive.

IF THE MOTION DETECTION IS NOT FUNCTIONING, PLEASE CONTACT US IMMEDIATELY AND DO NOT USE THE SMARTRVCONTROLS UNIT. WE WILL PROVIDE A REPLACEMENT DEVICE AT NO COST. WE TEST EACH UNIT, BUT INSIST THAT A TEST IS DONE WHEN CONTROLLING A MOTOR DRIVEN FEATURE TO ENSURE YOUR SAFETY.

Power: Is my unit powered correctly?

The smartRVcontrols module requires 12V DC 30-amp service. If the power is correctly connected to the two tabs in the back, marked 12V DC and Ground, the LED indicator in front will be green. If it does not illuminate, check to ensure that you have 12V DC and Ground on the wires and that your crimps are successful. You can also try swapping the two wires. Reverse voltage does not harm the smartRVcontrols module; it simply will not function until 12V DC and Ground are on the correct pins. If adding any wires, ensure they meet the electrical current requirements of the device being controlled.

Overcurrent protection and shorts to ground: My unit is not working and I hear a whining noise coming from the smartRVcontrols module.

The smartRVcontrols module has inherent overcurrent/short circuit protection built into the unit. You cannot break it by shorting out the outputs; they protect themselves against over current, and you can tell by the high-pitched sound made by the electronics. Also, the LED indicator will add a Red to its light sequence, and if connected the app will display an overcurrent warning. Once the problem is corrected, the module will work normally.

I am trying to pair, but the app keeps saying that the pin/passkey is incorrect?

There are two situations where this could occur:

Someone has set the PIN to a value different from what you are entering. Or you already have 4 phones paired to the unit.

Make the Switch to Wireless



SmartRV Controls

Trouble Shooting 2



While using the smartRVcontrols module to run a feature it “just stopped”. I tried the button again and it started working again, but it said I was in over current protection. What happened?

The smartRVcontrols module has inherent over current protection built into the unit. Motor driven RV features can run it to many issues: poor lubrication, tacky gaskets, pitching and binding slides or bent awnings, jacks that can generate enough force to twist your RV frame. The smartRVcontrols module actively monitors the total power sent to the RV feature you are controlling. Should that power exceed a safe level, the overcurrent warning is activated. The LED indicator will add a Red to its light sequence, and if connected the app will display an over current warning. Once the problem is corrected, the module will work normally. Before smartRVcontrols modules, people would just hold down the power switch, “forcing” more power to the unit. Many bad things can happen in that scenario; broken drive gears, burned out wires, blown fuses, bent metal. The smartRVcontrols module only allows the proper amount of power to be delivered, ensuring safe operation of your RV feature. If your smartRVcontrols module continues to overcurrent, it is an indication that your feature needs service.

I just bought a coach with smartRVcontrols modules, and I want to reset the pairing and PIN.

The smartRVcontrols module can be reset to factory defaults by holding the two front switches on the module for about 10 seconds. The indicator will cycle through all the colors and the smartRVcontrols module will reset all features to factory default, clear all pairings, and resets the PIN to 123456.

The pairing failed and I cannot seem to make it connect. I just want to start over?

Delete the device from your app. Select “delete device,” select the device, and then confirm. Close the app to clear the memory.

Go to the Bluetooth icon on your phone, or through the settings menu, and delete or forget the smartRVcontrols device from the list of known Bluetooth devices. Restart the pairing procedure.

My phone is not connecting to the smartRVapp.

Check that your phone’s Bluetooth is turned on and that location services are enabled, You can turn on Bluetooth via the phone’s settings menu. If there are already four paired smartphones, that is the limit of the number of paired smart devices at any time.